

# CLEANING THE MBX BUCKER


The stainless steel construction and tool-less design of the Mobius MBX Bucker make cleaning a snap! Here's how we recommend doing it.

## STEP 01.



First, push the e-stop button, rotate the lockout to the off position, and unplug the machine.

## STEP 05.

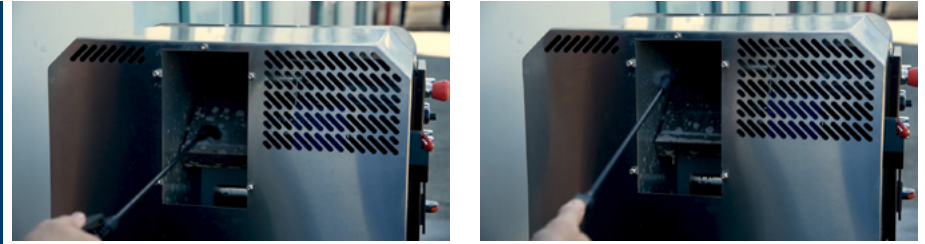


Spray the chipper, rotating it to spritz all sides with cleaner, and continue spraying the interior surfaces.

## STEP 02.



Remove the stem hole dieplate from the front of the machine by unscrewing the 4 screws at the corners, then sliding the plate up and off.

## STEP 06.

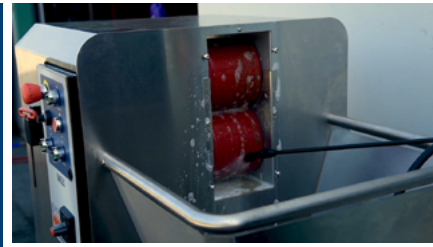

Spray the two rollers.

## STEP 03.



Remove the plexi panel covering the stem chipper on the back side of the machine in the same way.

## STEP 07.



Replace both covers.

## STEP 04.



Using a mixture of SuperClean and hot water, spray both these components and let them sit.

## STEP 08.



Plug the machine in, disengage the lockout and turn it on, making sure to select 'reverse direction'

**STEP 09.**



Allow the rollers and chipper to spin while the rest of the machine is sprayed with the cleaner to remove any plant debris and residue. You can use a soft brush to clean off any plant material that is more difficult to remove

**STEP 10.**



Turn the machine off, unplug it, and rinse it with water.

**STEP 11.**



Remove the dieplate covering the rollers and rinse with water

**STEP 12.**



Repeat this process on the opposite side with the chipper and plexi cover.

**STEP 13.**



Use a soft cloth to wipe off the components

**STEP 14.**



Reinstall the covers. Wipe down the whole machine to remove any remaining water.